



AI Face Device – Cloud Server Settings

APMMS / CloudXAPIBridge · AP Technosoft

Cloud Server: 157.66.191.102 | Port: 7789 | Portal: mms.aptechnosoft.com | apibridge.aptechnosoft.com

STEP 1 Device Settings

1. Press <MENU> → <System> → <Comm set> → <Ethernet> → <DHCP> and change to **'Yes'**
2. Press <MENU> → <System> → <Comm set> → <Server> and set the values below:


Setting	Value
Server Req	Select 'Yes'
Use DomainNm	Select 'No'
DomainNm	www.yunatt.com (No need to change)
Server IP	157.66.191.102 (device may show it as 157.066.191.102)
SerPortNo	7789
HeartBeat	3
Server Approval	Select 'No'

⬅ BACK	Server
Server Req	Yes
Use domainNm	No
DomainNm	www.yunatt.com
Server IP	157.066.191.102
SerPortNo	7789
Heartbeat	3
Server approval	No

Device "Server" screen after correct settings

STEP 2 Note the Device Serial Number

Check the device serial number (SN) in <MENU> → <Sys info> → <Info>

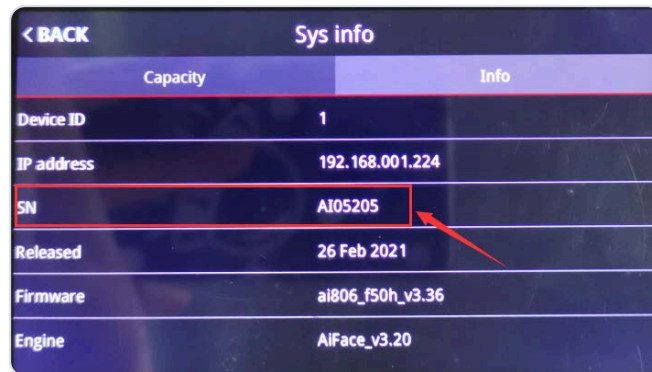

SN shown on the Sys info screen

STEP 3 Add Device in APMMS Portal

1. Login to the portal and open Devices → Device Master
2. Enter the details:

Serial No	Same SN as shown on the device (Step 2)
Device IP	Device's local IP (from Sys info)
Device Make	TIMMY
Device Model / Name	Model (e.g. AI06 / Ai26) and a name like "Main Gate"
Group (optional)	Devices in the same group auto-share new enrollments (Face / Finger / Card / Pin). Leave blank to disable.

3. Click **Save Changes**. The device appears in the **Devices** list with status **Active**.

EDIT DEVICE #4

SERIAL NO

AYUC24030818

DEVICE IP

192.168.1.225

DEVICE MAKE

TIMMY

DEVICE MODEL

AI06

DEVICE NAME

AI06

GROUP

optional

Save Changes

Cancel

Devices sharing a group auto-receive each other's new enrollments (Face/Finger/Card/Pin). Leave blank to disable automatic transfer for this device.


DEVICES

SERIAL NO	NAME	IP	MAKE / MODEL	GROUP	STATUS	ACTIONS
AYUC24030818	AI06	192.168.1.225	TIMMY AI06		Active	Edit Disable Delete
AYTD28046844	Device1	192.168.101.201	Device-1 Ai26	1	Active	Edit Disable Delete
AYTD28046845	Device-2	192.168.101.202	Timmy Ai26	1	Active	Edit Disable Delete
AIP3A4002543	Gate-1 Device	192.168.101.125	TIMMY Ai26	1	Active	Edit Disable Delete
AYUC23029831	VisitorGate	192.168.101.225	TIMMY Ai26	1	Active	Edit Disable Delete

Devices → Device Master

Tip: After saving, restart the device once. It should come **Online** on the dashboard within a few seconds (heartbeat 3s).

HELP Typing on the Device Keyboard

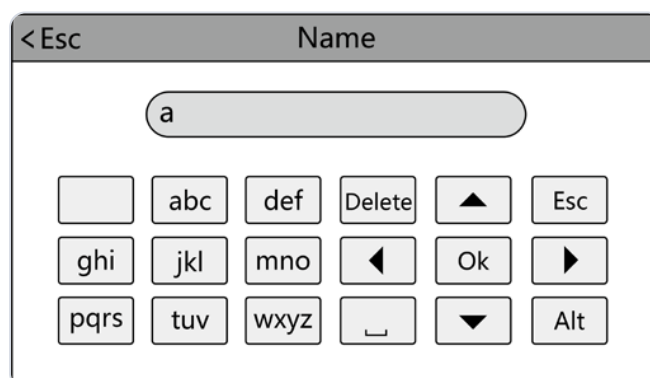

Touch **'Alt'** to switch between capital letters, small letters and numbers. After finishing, touch **'Ok'** to save.

How to input punctuation: when the input method is in capital/small letter mode, touch  repeatedly to choose the symbol. The first is *space*, the second is *dot* (.), and so on.